





HQHW FABRIC FLEXIBLE CONNECTOR



HQHW1 Type

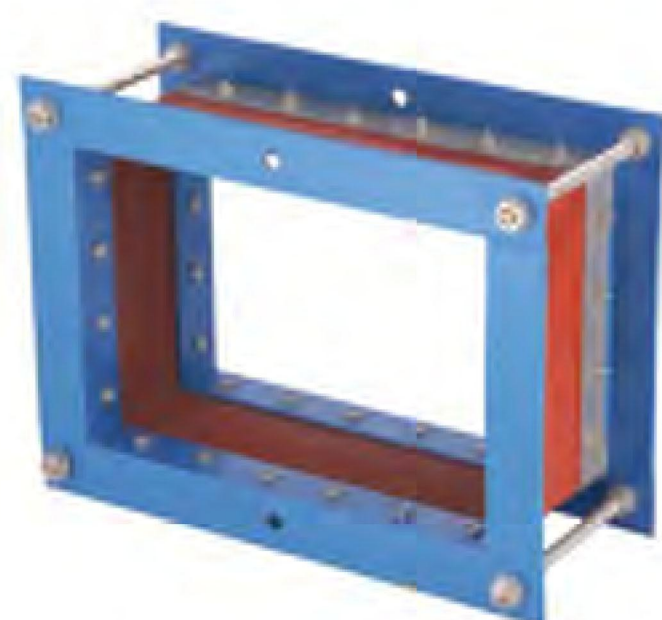

HQHW2 Type

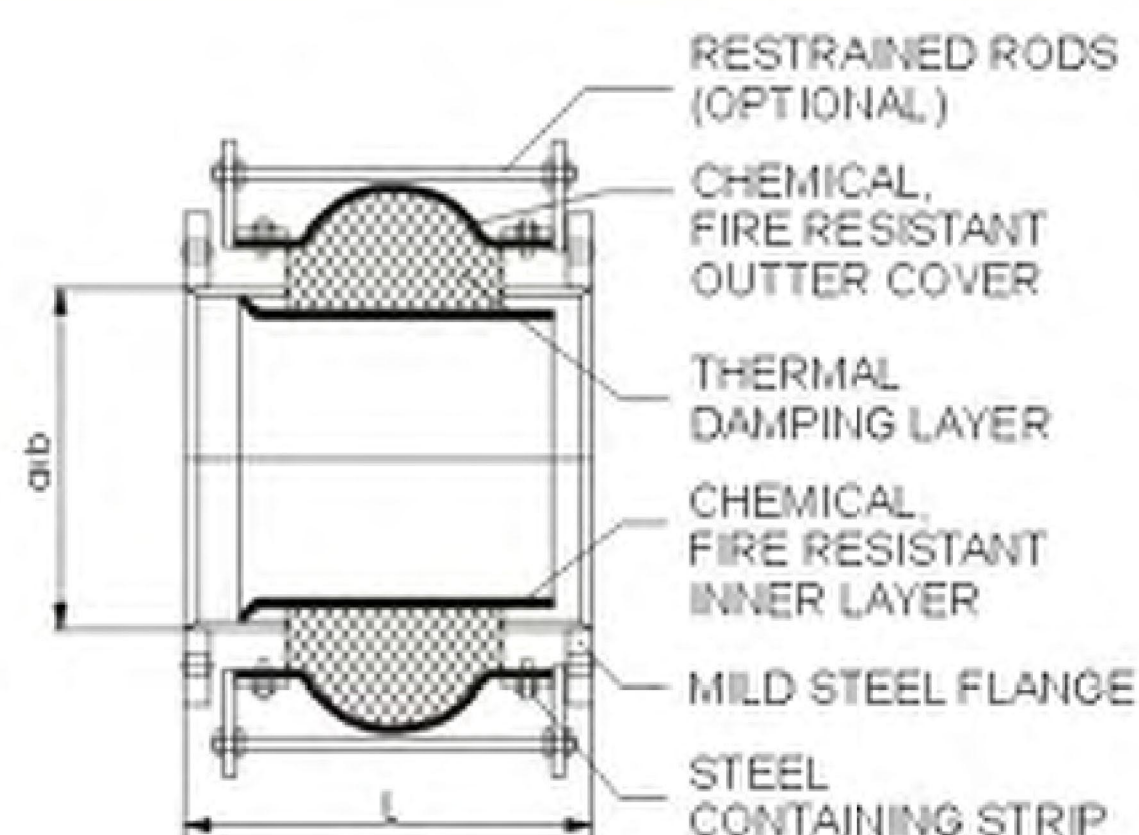


Application

Fabric Flexible Connectors are recommended to be used in duct systems to isolate vibration, compensate for thermal expansion, installation misalignments and torsion. The fabric is chemical resistant, fire resistant and leak free. They are very flexible and accommodate movements in the duct systems in several directions and combinations, widely used in HVAC system, fire protection system and industrial applications. Typical applications are connection of air handling unit, blowers, fans, fan coil units, etc. HQHW Connectors are available in various shapes and sizes.

Working Temperature: $-40^{\circ}\text{C} \sim 280^{\circ}\text{C}$

Working Pressure: 10 Kpa

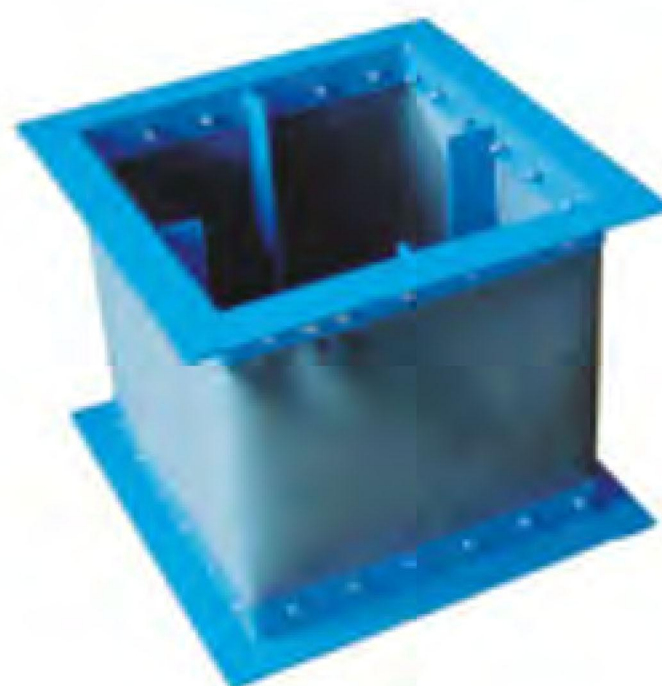

Other types are available upon request.

